
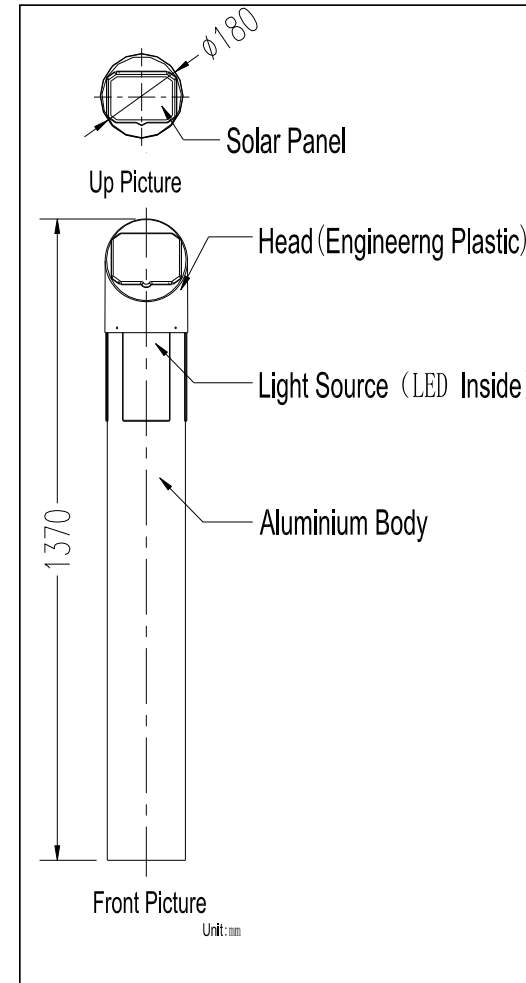


| | |
|----------------|--|
| Company | Solar Lighting Inc. |
| Website | www.solarlightinginc.com |
| Email | ross@solarlightinginc.com |

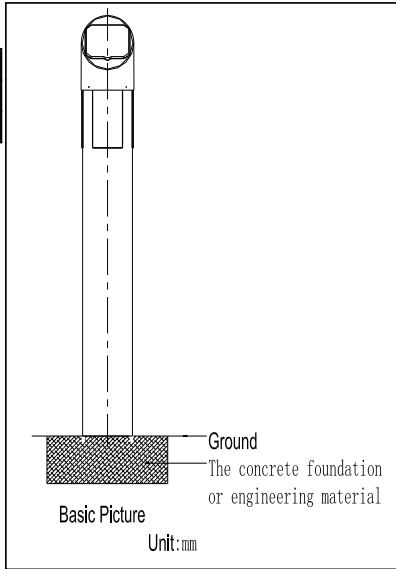

Function and Diameter

| Item | Specification |
|-----------------------|--|
| Light Source | SMD LED,0.06W*12PCS 500±30Lux (WH) |
| LED Color | White Light/Blue Light |
| Power | Mono Solar Panel, 6.0V, 383mA ,2.3W |
| Storage | Free Maintenance Li-Fe Battery, 3.2V, 1500Ah*2 |
| Control | Constant Bright, auto light sensor control, automatically on bright at night |
| Charging | 8-12 Hours (Under full Sun) |
| Lighting | 12 Hours + (Under Fully Charged Battery) |
| Operation Temperature | -20~+60 °C |
| Dimension | $\phi 180 \times 1370$ mm |
| Weight | 5.0 kg |
| IP | IP65 |

| | | | |
|--|-----------|----------------|--|
| | Model No. | Bollard | |
| | Color | White & Blue | |
| | Unit: | mm | |

